

## PROTECTION PRODUCTS DESCRIPTION

The SM712.TCT-CN transient voltage suppressor (TVS) diode is designed for asymmetrical (12V to -7V) protection in multi-point data transmission standard RS-485 applications. The SM712.TCT-CN may be used to protect devices from transient voltages resulting from electrostatic discharge (ESD). Electrical fast transients (EFT). And lightning.

The SM712.TCT-CN features 400 Watts ( $t_p=8/20\mu s$ ) of power handling capability to accommodate the higher transient voltage levels which may be expected in extended common mode applications. This provides higher equipment reliability and eliminates the “guess work” required when using zener diodes that are not rated to handle such transient conditions.

The SM712.TCT-CN replaces four discrete components by integrating two 12V and two 7V TVS diodes in single package. The integrated design aids in reducing voltage over-shoot associated with trace a inductance. The low clamping voltage of the SM712.TCT-CN minimizes the stress on the protected transceiver. The SOT23 package allows flexibility in the design of “crowded” circuit boards.

### Applications

- Protection of RS-485 transceivers with extended common-mode range
- Security systems
- Automatic Teller Machines
- HFC systems
- Networks

### Features

- 400Watts Peak Pulse Power per ( $t_p=8/20\mu s$ )
- Transient protection for asymmetrical data lines to IEC61000-4-2(ESD) 15kV(air), 8kV(contact) IEC61000-4-4(EFT) 40A(5/50  $\mu s$ ) IEC61000-4-5(Lightning):12A(8/20 $\mu s$ )
- Protects two +12V to -7V lines
- Low capacitance; Low clamping voltage
- Solid-state silicon avalanche technology


### Ordering Information

- Device: SM712.TCT-CN
- Package: SOT-23
- Packing: Tape & Reel
- Quantity per reel: 3,000pcs


### Mechanical Data

- JEDEC SOT-23 Package
- Molding compound flammability Rating: UL 94V-0
- High temperature soldering guaranteed: 260°C/10s
- Material: Halogen free


### Marking code



### Diagram



### Schematic








SOT23(Top View)

## ABSOLUTE MAXIMUM RATING

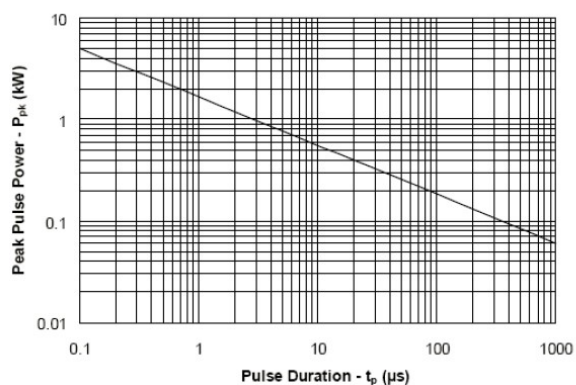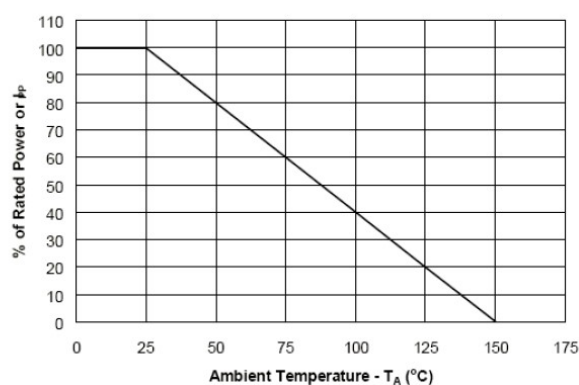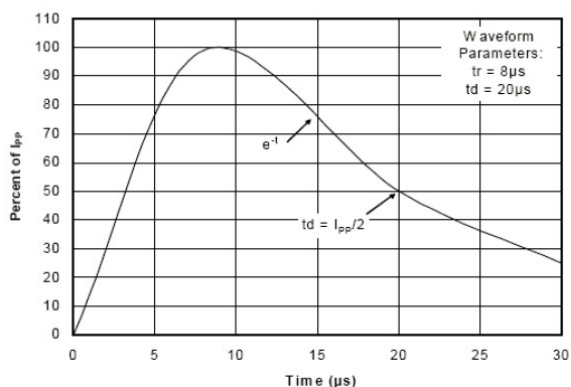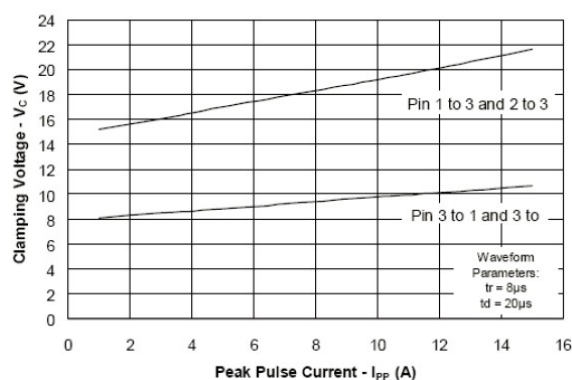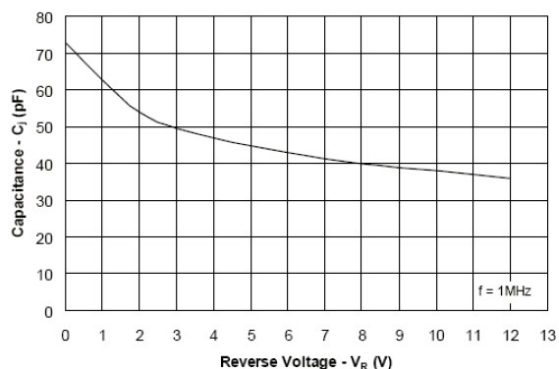
Parameters	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu s$ )	P <sub>PP</sub>	400	W
Peak Pulse Current ( $t_p=8/20\mu s$ )	I <sub>PP</sub>	17	A
Operating temperature	T <sub>OPT</sub>	-55-+125	°C
Storage temperature range	T <sub>STG</sub>	-55-+150	°C

## Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

Symbol	Parameter	Test Condition	Pin 1 to 3 and Pin 2 to 3 (12V) TVS			Pin 3 to 1 and Pin 3 to 2 (7V TVS)			Units
			Min	Typ	Max	Min	Typ	Max	
V <sub>RWM</sub>	Reverse Working Voltage	Pin 3 to 1 or Pin 2 to 1			12			7	V
V <sub>BR</sub>	Reverse Breakdown Voltage	I <sub>T</sub> = 1mA	13.3			7.5			V
I <sub>R</sub>	Reverse Leakage Current	V <sub>R</sub> = V <sub>RWM</sub>			1			20	μA
V <sub>C1</sub>	Clamping Voltage 1	I <sub>PP</sub> = 5A, t <sub>p</sub> = 8/20 $\mu s$			20			10	V
V <sub>C2</sub>	Clamping Voltage 2	I <sub>PP</sub> = 17A, t <sub>p</sub> = 8/20 $\mu s$			26			12	V
C <sub>J1</sub>	Junction Capacitance 1	V <sub>R</sub> = 0V, f = 1MHz			75			75	pF
C <sub>J2</sub>	Junction Capacitance 2	V <sub>R</sub> = V <sub>RWM</sub> , f = 1MHz		45			45		pF

**ELECTRICAL CHARACTERISTICS CURVE**
**Non-Repetitive Peak Pulse Power vs. Pulse Time**

**Power Derating Curve**

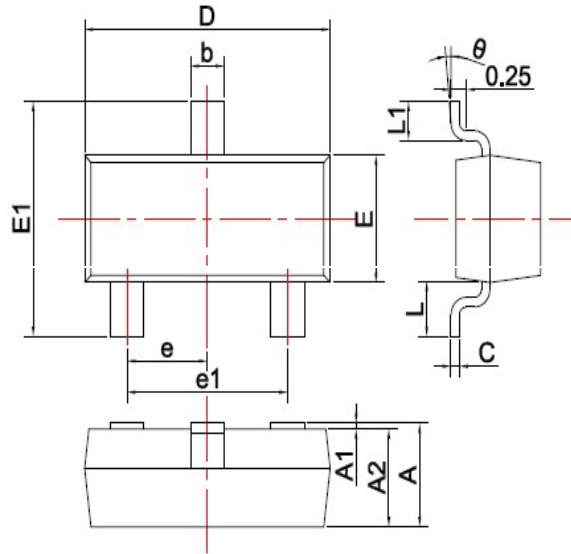**Pulse Waveform**

**Clamping Voltage vs. Peak Pulse Current**

**Capacitance vs. Reverse Voltage**


# SOT-23 PACKAGE OUTLINE Plastic surface mounted package




SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

## Precautions: PCB Design

(Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs)



## Note:

1. Controlling dimension: In millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

## NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。