

Features

- Optimized for LAN protection applications
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction chip
- 600w peak pulse power capability
- Excellent clamping capability
- Low incremental surge resistance
- Fast response time: typically less than 1.0ps from 0v to V_{BR} min

Mechanical Data

Case : Molded plastic body

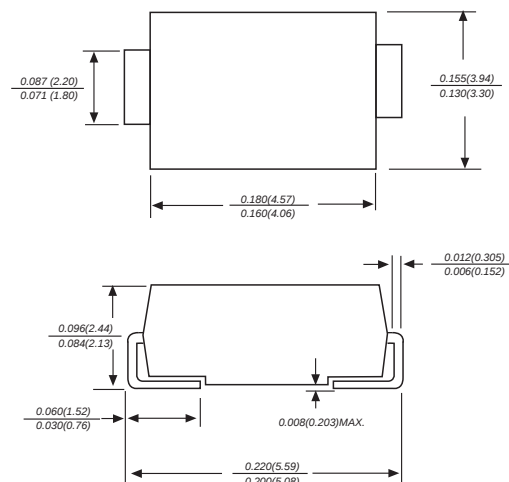
Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body


Mounting Position : Any

Weight : 0.0035 ounce, 0.098 grams

DO-214AA/SMB



Uni-Polar



Bi-Polar



Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	SYMBOLS	VALUE	UNITS
Peak pulse power dissipation with a 10/1000μs wavetorm(NOTE 1,2,FIG.1)	P_{PPM}	Minimum 600	Watts
Peak forward surge current (Note 1,2,3)	I_{FSM}	100.0	Amps
Peak pulse current with a 10/1000μs waveform(NOTE 1)	I_{PPM}	See Table 1	Amps
Steady state power dissipation (Note 3)	$P_{M(AV)}$	5.0	Watts
Maximum instantaneous forward voltage at 50A(Note 3,4) unidirectional only	V_F	3.5/5.0	Volts
Operating junction and storage temperature range	T_{STG}, T_J	-55 to + 150	°C

Notes:1.Non-repetitive current pulse,per Fig.3 and derated above $T_A=25^{\circ}C$ per Fig.2

2.Mounted on 5.0mm copper pads to each terminal


3.Measured on 8.3ms single half sine-wine.For uni-directional devices only.

4. $V_F=3.5V$ on SMB-5.0 thru SMB-220 devices and $V_F=5.0V$ on SMB-220 thru SMB-440 devices

Type	Marking	Peak Pulse Power	Stand-off Voltage	Maximum Reverse Current at VR	Breakdown Voltage at IT		Test Current	Maximum Peak Pulse Current	Maximum Clamping Voltage at Ipp
Bi-Polar	Bi-Polar	PPP	V(R)	IR	V (BR) (V)		IT	Ipp	Vc
		(W)	(V)	(μ A)	Min.	Max.	(mA)	(A)	(V)
SMBJ5.0CA	AE	600	5	800	6.4	7	10	65.3	9.2
SMBJ6.0CA	AG	600	6	800	6.67	7.37	10	58.3	10.3
SMBJ6.5CA	AK	600	6.5	500	7.22	7.98	10	53.6	11.2
SMBJ7.0CA	AM	600	7	200	7.78	8.6	10	50.0	12.0
SMBJ7.5CA	AP	600	7.5	100	8.33	9.21	1	46.6	12.9
SMBJ8.0CA	AR	600	8	50	8.89	9.83	1	44.2	13.6
SMBJ8.5CA	AT	600	8.5	20	9.44	10.4	1	41.7	14.4
SMBJ9.0CA	AV	600	9	10	10	11.1	1	39.0	15.4
SMBJ10CA	AX	600	10	5	11.1	12.3	1	35.3	17.0
SMBJ11CA	AZ	600	11	1	12.2	13.5	1	33.0	18.2
SMBJ12CA	BE	600	12	1	13.3	14.7	1	30.2	19.9
SMBJ13CA	BG	600	13	1	14.4	15.9	1	28.0	21.5
SMBJ14CA	BK	600	14	1	15.6	17.2	1	25.9	23.2
SMBJ15CA	BM	600	15	1	16.7	18.5	1	24.6	24.4
SMBJ16CA	BP	600	16	1	17.8	19.7	1	23.1	26.0
SMBJ17CA	BR	600	17	1	18.9	20.9	1	21.8	27.6
SMBJ18CA	BT	600	18	1	20	22.1	1	20.6	29.2
SMBJ20CA	BV	600	20	1	22.2	24.5	1	18.6	32.4
SMBJ22CA	BX	600	22	1	24.4	26.9	1	16.9	35.5
SMBJ24CA	BZ	600	24	1	26.7	29.5	1	15.5	38.9
SMBJ26CA	CE	600	26	1	28.9	31.9	1	14.3	42.1
SMBJ28CA	CG	600	28	1	31.1	34.4	1	13.3	45.4
SMBJ30CA	CK	600	30	1	33.3	36.8	1	12.4	48.4
SMBJ33CA	CM	600	33	1	36.7	40.6	1	11.3	53.3
SMBJ36CA	CP	600	36	1	40	44.2	1	10.4	58.1
SMBJ40CA	CR	600	40	1	44.4	49.1	1	9.3	64.5
SMBJ43CA	CT	600	43	1	47.8	52.8	1	8.7	69.4
SMBJ45CA	CV	600	45	1	50	55.3	1	8.3	72.7
SMBJ48CA	CX	600	48	1	53.3	58.9	1	7.8	77.4
SMBJ51CA	CZ	600	51	1	56.7	62.7	1	7.3	82.4
SMBJ54CA	DE	600	54	1	60	66.3	1	6.9	87.1
SMBJ58CA	DG	600	58	1	64.4	71.2	1	6.5	93.6
SMBJ60CA	DK	600	60	1	66.7	73.7	1	6.2	96.8
SMBJ64CA	DM	600	64	1	71.1	78.6	1	5.9	103
SMBJ70CA	DP	600	70	1	77.8	86	1	5.3	113
SMBJ75CA	DR	600	75	1	83.3	92.1	1	5.0	121
SMBJ78CA	DT	600	78	1	86.7	95.8	1	4.8	126
SMBJ85CA	DV	600	85	1	94.4	104	1	4.4	137
SMBJ90CA	DX	600	90	1	100	111	1	4.1	146
SMBJ100CA	DZ	600	100	1	111	123	1	3.7	162






Type	Marking	Peak Pulse Power	Stand-off Voltage	Maximum Reverse Current at VR	Breakdown Voltage at IT		Test Current	Maximum Peak Pulse Current	Maximum Clamping Voltage at Ipp
Bi-Polar	Bi-Polar	PPP	V(R)	IR	V (BR) (V)		IT	Ipp	Vc
		(W)	(V)	(uA)	Min.	Max.	(mA)	(A)	(V)
SMBJ110CA	EE	600	110	1	122	135	1	3.4	177
SMBJ120CA	EG	600	120	1	133	147	1	3.1	193
SMBJ130CA	EK	600	130	1	144	159	1	2.9	209
SMBJ150CA	EM	600	150	1	167	185	1	2.5	243
SMBJ160CA	EP	600	160	1	178	197	1	2.3	259
SMBJ170CA	ER	600	170	1	189	209	1	2.2	275
SMBJ180CA	ET	600	180	1	201	222	1	2.1	292
SMBJ188CA	EB	600	188	1	209	231	1	2.0	304
SMBJ200CA	EV	600	200	1	224	247	1	1.9	324
SMBJ220CA	EX	600	220	1	246	272	1	1.7	356
SMBJ250CA	EZ	600	250	1	279	309	1	1.5	405
SMBJ300CA	FE	600	300	1	335	371	1	1.3	486
SMBJ350CA	FG	600	350	1	391	432	1	1.1	567
SMBJ400CA	FK	600	400	1	447	494	1	0.9	648
SMBJ440CA	FM	600	440	1	492	543	1	0.9	713

Marking For Bi-Polar




Symbol	Explanation
B	Marking Code, as above sheet

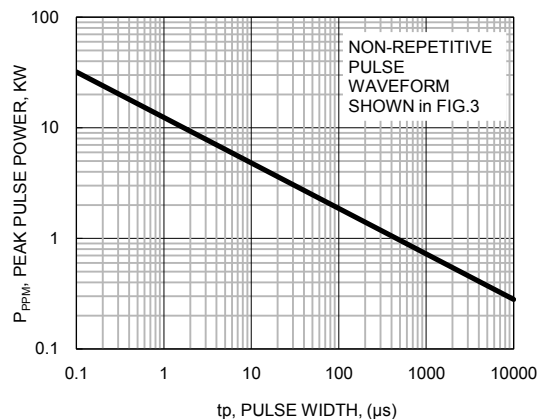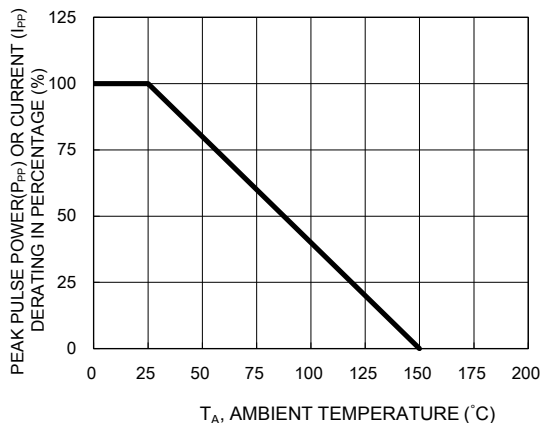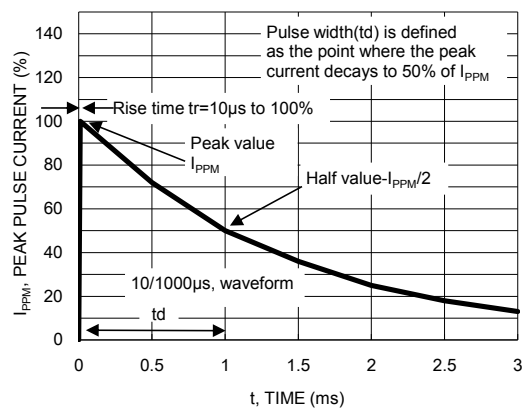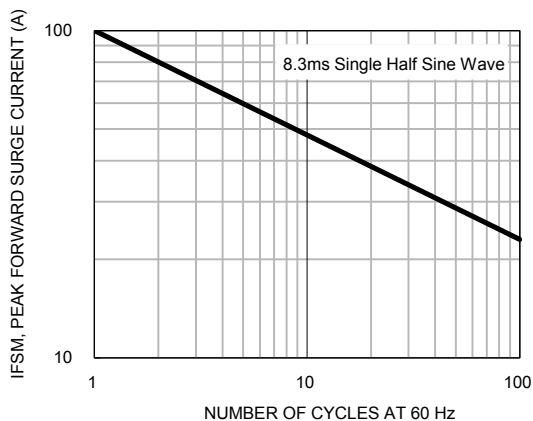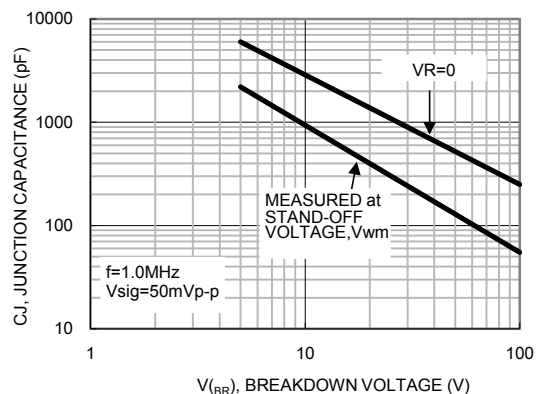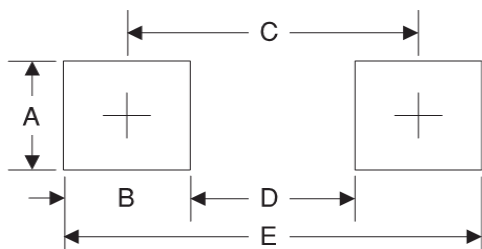Ratings And Characteristic Curves

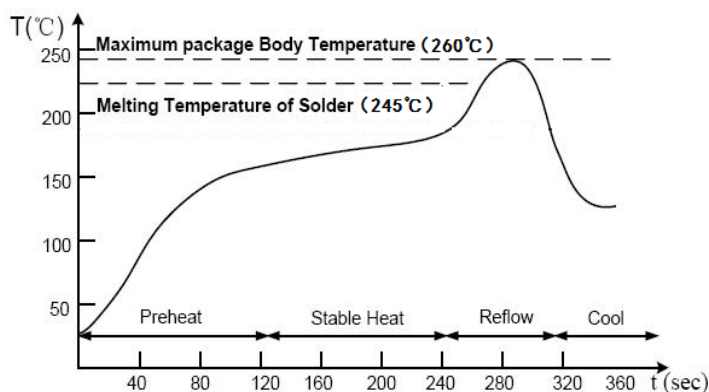
Fig1. Peak Pulse Power Rating Curve

Fig2. Pulse Derating Curve

Fig3. Clamping Power Pulse Waveform

Fig4. Maximum Non-Repetitive Forward Surge Current Unidirectional Only

Fig5. Typical Junction Capacitance


Suggested Pad Layout



Symbol	Unit (mm)	Unit (inch)
A	2.30	0.091
B	2.00	0.078
C	4.10	0.161
D	2.10	0.083
E	6.10	0.240

Suggested Soldering Temperature Profile

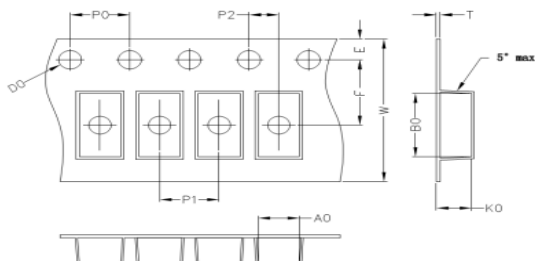


Note

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 260°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Carrier Dimension(mm)



A0	B0	K0	D0	E	F
3.80	5.40	2.45	1.55	1.75	5.50
P0	P1	P2	T	W	Tolerance
4.0	8.0	2.0	0.25	12	0.1

Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
SMB	13'	330	3.0	340	6.0	360*360*360	48

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。