


Features

- Glass passivated junction chip
- 200 W peak pulse power capability with a 10/1000 us waveform, repetitive rate (duty cycle):0.01 %
- Excellent clamping capability
- Low reverse leakage
- Very fast response time
- Lead and body according with RoHS standard

Mechanical Data

- Case: SOD123FL Molded plastic
- Lead: Solderable per MIL-STD-750, method 2026
- Epoxy: UL 94V-0 rate flame retardant
- Polarity: Color band denotes cathode end except Bipolar
- Mounting position: Any

SOD123FL

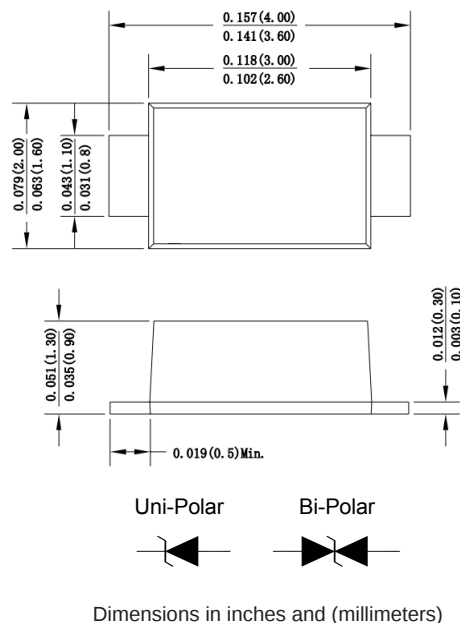

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	Value	Unit
Peak power dissipation with a 10/1000 us waveform ⁽¹⁾	P_{PP}	200	W
Peak pulse current with a 10/1000 us waveform ⁽¹⁾	I_{PP}	See Next Table	A
Power dissipation on infinite heatsink at $T_L = 75^\circ\text{C}$	P_D	0.4	W
Peak forward surge current, 8.3 ms single half sinewave unidirectional only ⁽²⁾	I_{FSM}	30	A
Maximum instantaneous forward voltage at 10 A for unidirectional only ⁽³⁾	V_F	3.5	V
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150	°C

Note:

1)Non-repetitive current pulse per Fig.5 and derated above $T_A = 25^\circ\text{C}$ per Fig.1 ;


2)Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum ;

200W Surface Mount Transient Voltage Suppressors

Type		Marking		Peak Pulse Power	Stand-off Voltage	Maximum Reverse Current at Vr	Breakdown Voltage at IT		Test Current	Maximum Peak Pulse Current	Maximum Clamping Voltage at Ipp
Uni-Polar	Bi-Polar	Uni-Polar	Bi-Polar	PPP	V(R)	IR	V (BR) (V)		IT	Ipp	Vc
					(V)	(μ A)	Min.	Max.	(mA)	(A)	(V)
SMF3.3A	SMF3.3CA	AD	HD	200	3.3	400	5.2	6.0	10	23.5	8.5
SMF5.0A	SMF5.0CA	AE	HE	200	5	400	6.4	7	10	21.7	9.2
SMF6.0A	SMF6.0CA	AG	HG	200	6	400	6.67	7.37	10	19.4	10.3
SMF6.5A	SMF6.5CA	AK	HK	200	6.5	250	7.22	7.98	10	17.9	11.2
SMF7.0A	SMF7.0CA	AM	HM	200	7	100	7.78	8.6	10	16.7	12.0
SMF7.5A	SMF7.5CA	AP	HP	200	7.5	50	8.33	9.21	1	15.5	12.9
SMF8.0A	SMF8.0CA	AR	HR	200	8	25	8.89	9.83	1	14.7	13.6
SMF8.5A	SMF8.5CA	AT	HT	200	8.5	10	9.44	10.4	1	13.9	14.4
SMF9.0A	SMF9.0CA	AV	HV	200	9	5	10	11.1	1	13.0	15.4
SMF10A	SMF10CA	AX	HX	200	10	2.5	11.1	12.3	1	11.8	17.0
SMF11A	SMF11CA	AZ	HZ	200	11	2.5	12.2	13.5	1	11.0	18.2
SMF12A	SMF12CA	BE	IE	200	12	2.5	13.3	14.7	1	10.1	19.9
SMF13A	SMF13CA	BG	IG	200	13	1	14.4	15.9	1	9.3	21.5
SMF14A	SMF14CA	BK	IK	200	14	1	15.6	17.2	1	8.6	23.2
SMF15A	SMF15CA	BM	IM	200	15	1	16.7	18.5	1	8.2	24.4
SMF16A	SMF16CA	BP	IP	200	16	1	17.8	19.7	1	7.7	26.0
SMF17A	SMF17CA	BR	IR	200	17	1	18.9	20.9	1	7.2	27.6
SMF18A	SMF18CA	BT	IT	200	18	1	20	22.1	1	6.8	29.2
SMF20A	SMF20CA	BV	IV	200	20	1	22.2	24.5	1	6.2	32.4
SMF22A	SMF22CA	BX	IX	200	22	1	24.4	26.9	1	5.6	35.5
SMF24A	SMF24CA	BZ	IZ	200	24	1	26.7	29.5	1	5.1	38.9
SMF26A	SMF26CA	CE	JE	200	26	1	28.9	31.9	1	4.8	42.1
SMF28A	SMF28CA	CG	JG	200	28	1	31.1	34.4	1	4.4	45.4
SMF30A	SMF30CA	CK	JK	200	30	1	33.3	36.8	1	4.1	48.4
SMF33A	SMF33CA	CM	JM	200	33	1	36.7	40.6	1	3.8	53.3
SMF36A	SMF36CA	CP	JP	200	36	1	40	44.2	1	3.4	58.1
SMF40A	SMF40CA	CR	JR	200	40	1	44.4	49.1	1	3.1	64.5
SMF43A	SMF43CA	CT	JT	200	43	1	47.8	52.8	1	2.9	69.4
SMF45A	SMF45CA	CV	JV	200	45	1	50	55.3	1	2.8	72.7
SMF48A	SMF48CA	CX	JX	200	48	1	53.3	58.9	1	2.6	77.4
SMF51A	SMF51CA	CZ	JZ	200	51	1	56.7	62.7	1	2.4	82.4
SMF54A	SMF54CA	DE	KE	200	54	1	60	66.3	1	2.3	87.1
SMF58A	SMF58CA	RG	KG	200	58	1	64.4	71.2	1	2.1	93.6
SMF60A	SMF60CA	RK	KK	200	60	1	66.7	73.7	1	2.1	96.8
SMF64A	SMF64CA	RM	KM	200	64	1	71.1	78.6	1	1.9	103
SMF70A	SMF70CA	RP	KP	200	70	1	77.8	86	1	1.7	113
SMF75A	SMF75CA	RR	KR	200	75	1	83.3	92.1	1	1.6	121
SMF78A	SMF78CA	RT	KT	200	78	1	86.7	95.8	1	1.6	126
SMF85A	SMF85CA	RV	KV	200	85	1	94.4	104	1	1.5	137
SMF90A	SMF90CA	RW	KX	200	90	1	100	111	1	1.2	146
SMF100A	SMF100CA	RX	KZ	200	100	1	111	123	1	1.1	162


Type		Marking		Peak Pulse Power	Stand-off Voltage	Maximum Reverse Current at VR	Breakdown Voltage at IT		Test Current	Maximum Peak Pulse Current	Maximum Clamping Voltage at Ipp
Uni-Polar	Bi-Polar	Uni-Polar	Bi-Polar	PPP	V(R)	IR	V (BR) (V)		IT	Ipp	Vc
					(V)	(uA)	Min.	Max.	(mA)	(A)	(V)
SMF110A	SMF110CA	SE	LE	200	110	1	122	135	1	1.1	177
SMF120A	SMF120CA	SG	LG	200	120	1	133	147	1	1.0	193
SMF130A	SMF130CA	SK	LK	200	130	1	144	159	1	1.0	209
SMF150A	SMF150CA	SM	LM	200	150	1	167	185	1	0.8	243
SMF160A	SMF160CA	SP	LP	200	160	1	178	197	1	0.8	259
SMF170A	SMF170CA	SR	LR	200	170	1	189	209	1	0.7	275
SMF180A	SMF180CA	ST	LT	200	180	1	201	222	1	0.7	292
SMF188A	SMF188CA	SV	LV	200	188	1	209	231	1	0.7	304
SMF200A	SMF200CA	SX	LX	200	200	1	224	247	1	0.6	324
SMF220A	SMF220CA	SZ	LZ	200	220	1	246	272	1	0.6	356
SMF250A	SMF250CA	TE	ME	200	250	1	279	309	1	0.5	405

Marking For Uni-Polar



Symbol	Explanation
A	Color Band Denotes Cathode
B	Marking Code, as above sheet

Marking For Bi-Polar



Symbol	Explanation
B	Marking Code, as above sheet

Ratings And Characteristic Curves

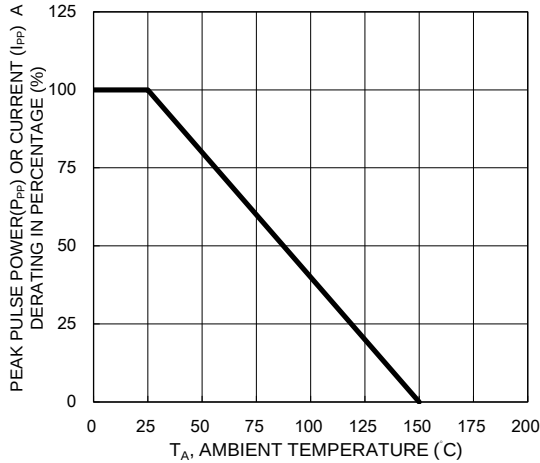


Fig. 1 - Pulse Derating Curve

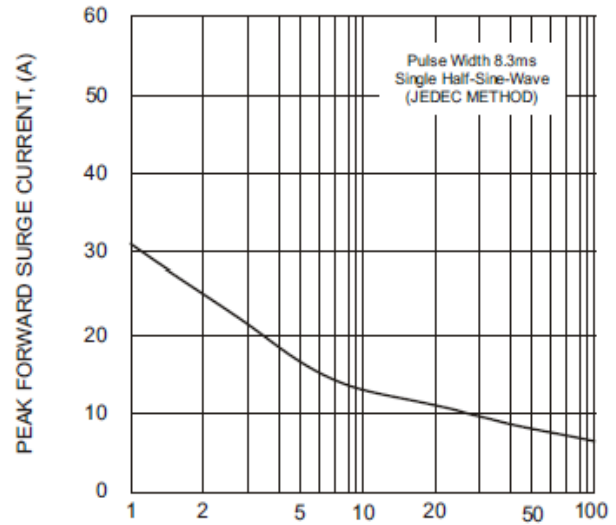


Fig. 2 - Maximum Non-Repetitive
Surge Current

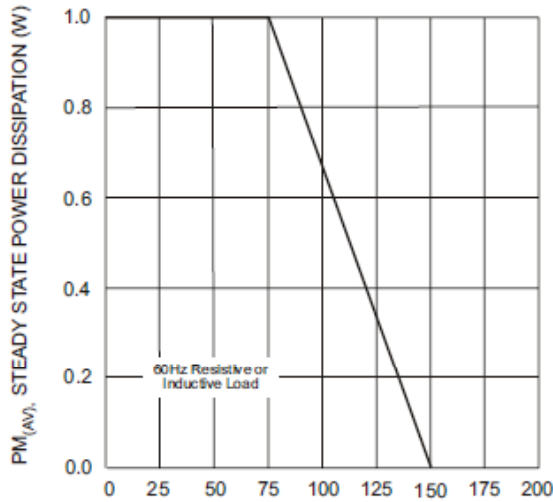


Fig. 3 - Steady State Power Derating Curve

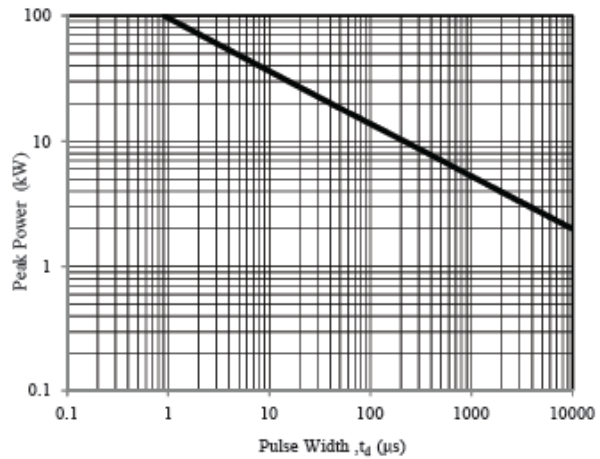


Fig. 4 - Peak Pulse Power Rating Curve

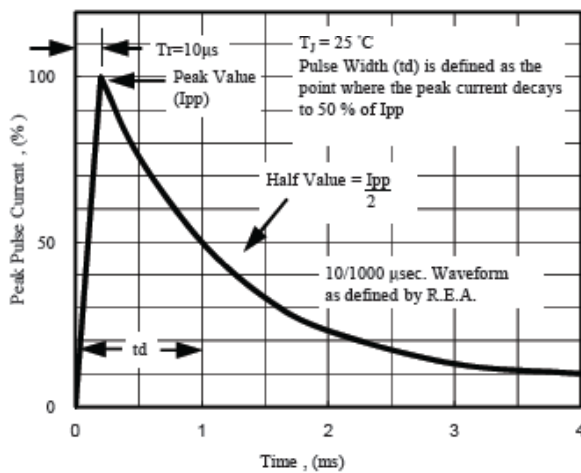


Fig. 5 - Pulse Waveform


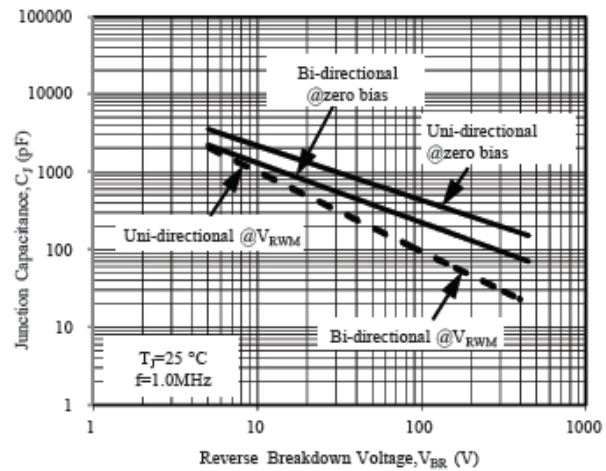



Fig. 6 - Typical Junction Capacitance

Suggested Pad Layout

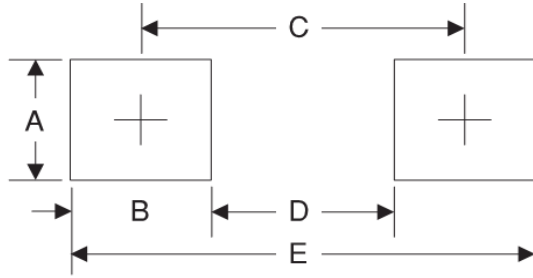

Symbol	Unit (mm)	Unit (inch)
A	1.2	0.048
B	1.15	0.045
C	3.10	0.122
D	1.95	0.077
E	4.25	0.167

Suggested Soldering Temperature Profile

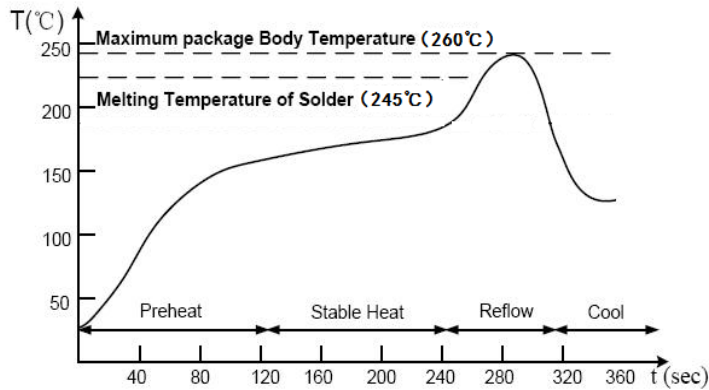


Note

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 260°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Carrier Dimension(mm)

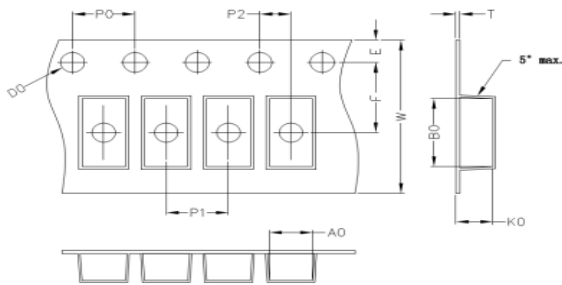

A0	B0	K0	D0	E	F
2.15	3.95	1.35	1.55	1.75	3.50
P0	P1	P2	T	W	Tolerance
4.0	4.0	2.0	0.25	8	0.1

Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
SOD123FL	7'	178	3	180	15	380*200*200	150

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。