

Features

- ◆ Optimized for LAN protection applications
- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated junction chip
- ◆ 400w peak pulse power capability
- ◆ Excellent clamping capability
- ◆ Low incremental surge resistance
- ◆ Fast response time: typically less than 1.0ps from 0v to V_{BRmin}

Mechanical Data

Case : Molded plastic body


Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any


Weight : 0.0023 ounce, 0.07 grams

DO-214AC/SMA

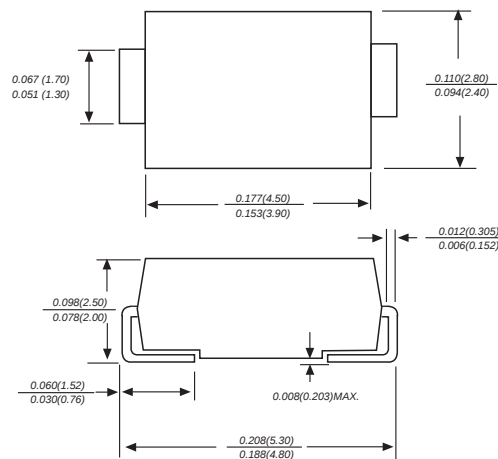

Uni-Polar

Bi-Polar



Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	SYMBOLS	VALUE	UNITS
Peak pulse power dissipation with a 10/1000μs wavetorm(NOTE 1,2,4,FIG.1)	P_{PPM}	Minimum 400	Watts
Peak forward surge current (Note 3)	I_{FSM}	40.0	Amps
Peak pulse current with a 10/1000μs waveform(NOTE 1,2,5)Fig.2	I_{PPM}	See Table 1	Amps
Steady State Power Dissipation(Note 4)	$P_{M(AV)}$	1.0	Watts
Operating junction and storage temperature range	T_{STG}, T_J	-55 to + 150	°C

Notes:1.Non-repetitive current pulse,per Fig.3 and derated above $T_A=25^{\circ}C$ per Fig.2

2.Mounted on 5.0mm copper pads to each terminal

3.Measured on 8.3ms single half sine-wine.For uni-directional devices only.

4.Lead temperature at $75^{\circ}C=T_L$


5.Peak pulse power waveform is 10/1000μs

400W Surface Mount Transient Voltage Suppressors

Type		Marking		Peak Pulse Power	Stand-off Voltage	Maximum Reverse Current at VR	Breakdown Voltage at IT		Test Current	Maximum Peak Pulse Current	Maximum Clamping Voltage at Ipp
Uni-Polar	Bi-Polar	Uni- Polar	Bi- Polar	PPP	V(R)	IR	V (BR) (V)		IT (mA)	Ipp (A)	Vc (V)
				(W)	(V)	(μ A)	Min.	Max.			
SMAJ5.0A	SMAJ5.0CA	AE	WE	400	5	800	6.4	7	10	43.5	9.2
SMAJ6.0A	SMAJ6.0CA	AG	WG	400	6	800	6.67	7.37	10	38.8	10.3
SMAJ6.5A	SMAJ6.5CA	AK	WK	400	6.5	500	7.22	7.98	10	35.7	11.2
SMAJ7.0A	SMAJ7.0CA	AM	WM	400	7	200	7.78	8.6	10	33.3	12.0
SMAJ7.5A	SMAJ7.5CA	AP	WP	400	7.5	100	8.33	9.21	1	31.0	12.9
SMAJ8.0A	SMAJ8.0CA	AR	WR	400	8	50	8.89	9.83	1	29.4	13.6
SMAJ8.5A	SMAJ8.5CA	AT	WT	400	8.5	20	9.44	10.4	1	27.8	14.4
SMAJ9.0A	SMAJ9.0CA	AV	WV	400	9	10	10	11.1	1	26.0	15.4
SMAJ10A	SMAJ10CA	AX	WX	400	10	5	11.1	12.3	1	23.5	17.0
SMAJ11A	SMAJ11CA	AZ	WZ	400	11	1	12.2	13.5	1	22.0	18.2
SMAJ12A	SMAJ12CA	BE	XE	400	12	1	13.3	14.7	1	20.1	19.9
SMAJ13A	SMAJ13CA	BG	XG	400	13	1	14.4	15.9	1	18.6	21.5
SMAJ14A	SMAJ14CA	BK	XK	400	14	1	15.6	17.2	1	17.2	23.2
SMAJ15A	SMAJ15CA	BM	XM	400	15	1	16.7	18.5	1	16.4	24.4
SMAJ16A	SMAJ16CA	BP	XP	400	16	1	17.8	19.7	1	15.4	26.0
SMAJ17A	SMAJ17CA	BR	XR	400	17	1	18.9	20.9	1	14.5	27.6
SMAJ18A	SMAJ18CA	BT	XT	400	18	1	20	22.1	1	13.7	29.2
SMAJ20A	SMAJ20CA	BV	XV	400	20	1	22.2	24.5	1	12.3	32.4
SMAJ22A	SMAJ22CA	BX	XX	400	22	1	24.4	26.9	1	11.3	35.5
SMAJ24A	SMAJ24CA	BZ	XZ	400	24	1	26.7	29.5	1	10.3	38.9
SMAJ26A	SMAJ26CA	CE	YE	400	26	1	28.9	31.9	1	9.5	42.1
SMAJ28A	SMAJ28CA	CG	YG	400	28	1	31.1	34.4	1	8.8	45.4
SMAJ30A	SMAJ30CA	CK	YK	400	30	1	33.3	36.8	1	8.3	48.4
SMAJ33A	SMAJ33CA	CM	YM	400	33	1	36.7	40.6	1	7.5	53.3
SMAJ36A	SMAJ36CA	CP	YP	400	36	1	40	44.2	1	6.9	58.1
SMAJ40A	SMAJ40CA	CR	YR	400	40	1	44.4	49.1	1	6.2	64.5
SMAJ43A	SMAJ43CA	CT	YT	400	43	1	47.8	52.8	1	5.8	69.4
SMAJ45A	SMAJ45CA	CV	YV	400	45	1	50	55.3	1	5.5	72.7
SMAJ48A	SMAJ48CA	CX	YX	400	48	1	53.3	58.9	1	5.2	77.4
SMAJ51A	SMAJ51CA	CZ	YZ	400	51	1	56.7	62.7	1	4.9	82.4
SMAJ54A	SMAJ54CA	RE	ZE	400	54	1	60	66.3	1	4.6	87.1
SMAJ58A	SMAJ58CA	RG	ZG	400	58	1	64.4	71.2	1	4.3	93.6
SMAJ60A	SMAJ60CA	RK	ZK	400	60	1	66.7	73.7	1	4.1	96.8
SMAJ64A	SMAJ64CA	RM	ZM	400	64	1	71.1	78.6	1	3.9	103
SMAJ70A	SMAJ70CA	RP	ZP	400	70	1	77.8	86	1	3.5	113
SMAJ75A	SMAJ75CA	RR	ZR	400	75	1	83.3	92.1	1	3.3	121
SMAJ78A	SMAJ78CA	RT	ZT	400	78	1	86.7	95.8	1	3.2	126
SMAJ85A	SMAJ85CA	RV	ZV	400	85	1	94.4	104	1	2.9	137
SMAJ90A	SMAJ90CA	RX	ZX	400	90	1	100	111	1	2.7	146
SMAJ100A	SMAJ100CA	RZ	ZZ	400	100	1	111	123	1	2.5	162


Type		Marking		Peak Pulse Power	Stand-off Voltage	Maximum Reverse Current at VR	Breakdown Voltage at IT		Test Current	Maximum Peak Pulse Current	Maximum Clamping Voltage at Ipp
Uni-Polar	Bi-Polar	Uni-Polar	Bi-Polar	PPP	V(R)	IR	V (BR) (V)		IT	Ipp	Vc
				(W)	(V)	(μ A)	Min.	Max.			
SMAJ110A	SMAJ110CA	SE	VE	400	110	1	122	135	1	2.3	177
SMAJ120A	SMAJ120CA	SG	VG	400	120	1	133	147	1	2.1	193
SMAJ130A	SMAJ130CA	SK	VK	400	130	1	144	159	1	1.9	209
SMAJ150A	SMAJ150CA	SM	VM	400	150	1	167	185	1	1.6	243
SMAJ160A	SMAJ160CA	SP	VP	400	160	1	178	197	1	1.5	259
SMAJ170A	SMAJ170CA	SR	VR	400	170	1	189	209	1	1.5	275
SMAJ180A	SMAJ180CA	ST	VT	400	180	1	201	222	1	1.4	292
SMAJ200A	SMAJ200CA	SV	VV	400	200	1	224	247	1	1.2	324
SMAJ220A	SMAJ220CA	SX	VX	400	220	1	246	272	1	1.1	356
SMAJ250A	SMAJ250CA	SZ	VZ	400	250	1	279	309	1	1.0	405
SMAJ300A	SMAJ300CA	TE	UE	400	300	1	335	371	1	0.8	486
SMAJ350A	SMAJ350CA	TG	UG	400	350	1	391	432	1	0.7	567
SMAJ400A	SMAJ400CA	TK	UK	400	400	1	447	494	1	0.6	648
SMAJ440A	SMAJ440CA	TM	UM	400	440	1	492	543	1	0.6	713

Marking For Uni-Polar



Symbol	Explanation
A	Color Band Denotes Cathode
B	Marking Code, as above sheet

Marking For Bi-Polar



Symbol	Explanation
B	Marking Code, as above sheet

Ratings And Characteristic Curves

Fig.1 Peak Pulse Power Rating Curve

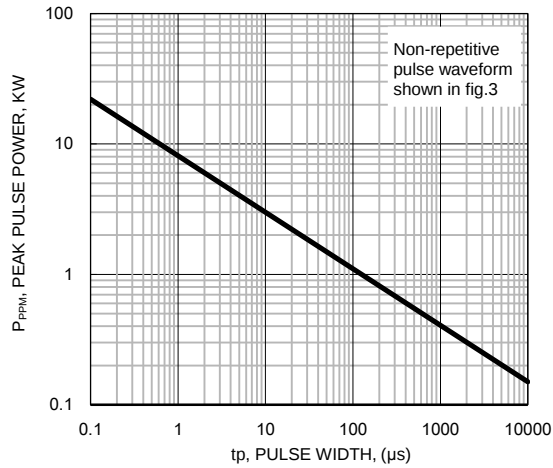


Fig.2 Pulse Derating Curve

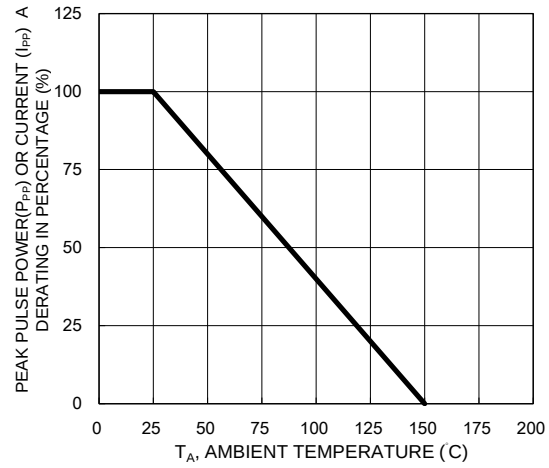


Fig.3 Claming Power Pulse Waveform

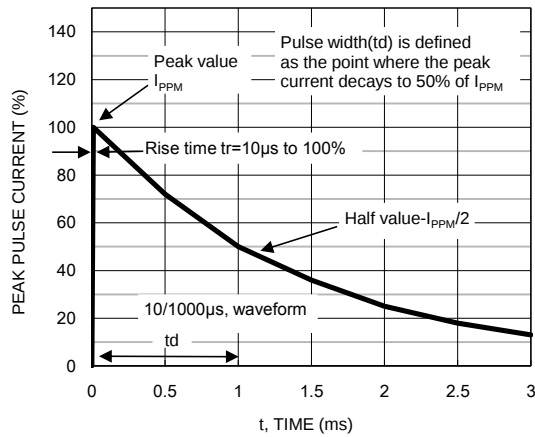


Fig.4 Maximum Non-repetitive Forward Surge Current



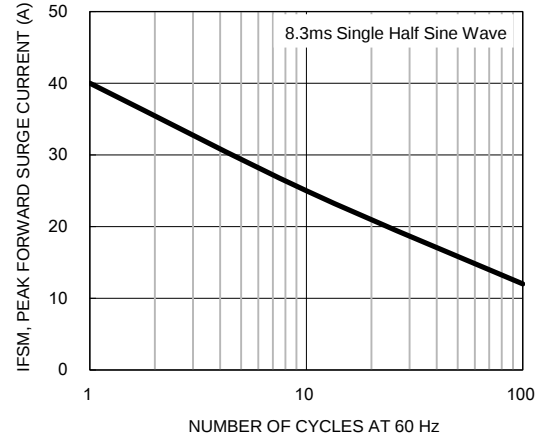


Fig.5 Typical Junction Capacitance

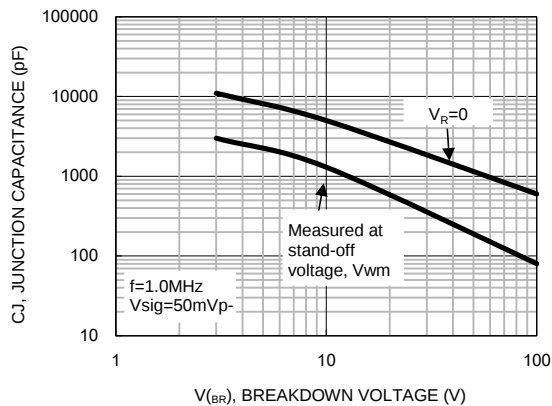


Suggested Pad Layout

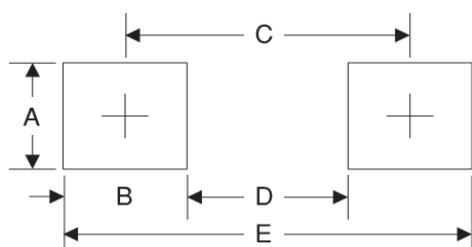

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.90	0.154
D	2.41	0.095
E	5.45	0.215

Suggested Soldering Temperature Profile

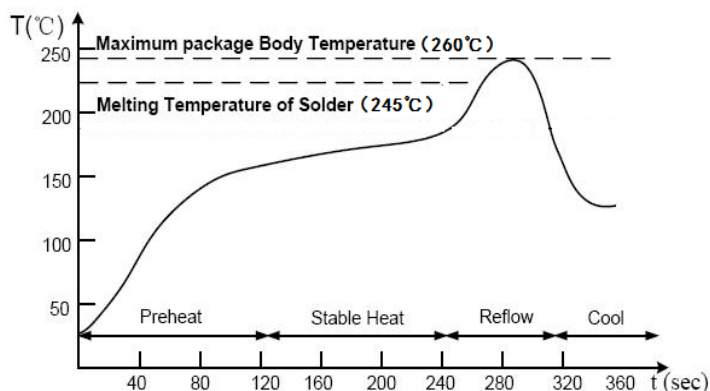


Note

- Recommended reflow methods: IR, vapor phase oven, hot air oven, wave solder.
- The device can be exposed to a maximum temperature of 260°C for 10 seconds.
- Devices can be cleaned using standard industry methods and solvents.
- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Package Information

Carrier Dimension(mm)

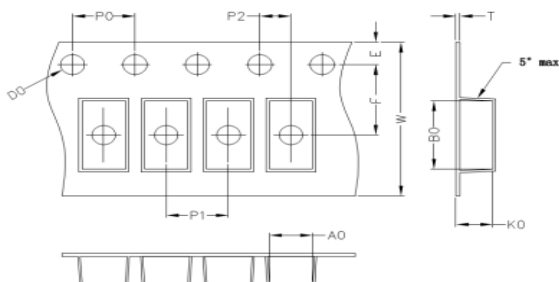

A0	B0	K0	D0	E	F
2.80	5.30	2.36	1.55	1.75	5.50
P0	P1	P2	T	W	Tolerance
4.0	4.0	2.0	0.25	12	0.1

Package Specifications

Package	Reel Size	Reel DIA. (mm)	Q'TY/Reel (Kpcs)	Box Size (mm)	QTY/Box (Kpcs)	Carton Size (mm)	Q'TY/Carton (Kpcs)
SMA	11'	278	5	285	10	355*310*310	80

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。