

Product Summary

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
60V	15mΩ@10V	45A
	17mΩ@4.5V	


Feature

Fast Switching
Low Gate Charge and Rdson
100% Single Pulse avalanche energy Test


Applications

DC-DC Converter
Load Switching


Package

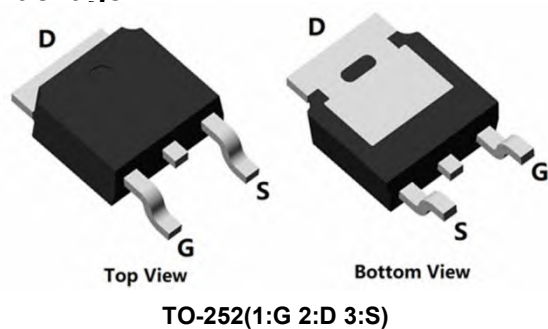

Circuit diagram



Marking



Order Information

Device	Package	Unit/Tape
CD15RN06M	TO-252	2500

Absolute maximum ratings (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current($T_c=25^\circ\text{C}$)	I_D	45	A
Continuous Drain Current($T_c=100^\circ\text{C}$)	I_D	53	A
Pulsed Drain Current	I_{DM}	180	A
Single Pulse Avalanche Energy ¹	E_{AS}	121	mJ
Power Dissipation($T_c=25^\circ\text{C}$)	P_D	40	W
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	3.1	$^\circ\text{C/W}$
Storage Temperature Range	T_{STG}	-55 to 150	$^\circ\text{C}$
Operating Junction Temperature Range	T_J	-55 to 150	$^\circ\text{C}$


Electrical characteristics (Ta=25°C, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	VGS=0V , ID=250uA	60	-	-	V
Drain-Source Leakage Current	IDSS	VDS=48V , VGS=0V , TJ=25℃	-	-	1	uA
Gate-Source Leakage Current	IGSS	VGS=±20V , VDS=0V	-	-	±100	nA
Gate Threshold Voltage	VGS(th)	VGS=VDS , ID =250uA	1.0	1.8	2.5	V
Static Drain-Source On-Resistance	RDS(ON)	VGS=10V , ID=15A	-	15	19	mΩ
		VGS=4.5V , ID=10A	-	17	23	
Dynamic characteristics						
Input Capacitance	Ciss	VDS=30V , VGS=0V , f=1MHz	-	2050	-	pF
Output Capacitance	Coss		-	150	-	
Reverse Transfer Capacitance	Crss		-	120	-	
Total Gate Charge	Qg	VDS=30V , VGS=10V , ID=20A	-	38	-	nC
Gate-Source Charge	Qgs		-	5.6	-	
Gate-Drain Charge	Qgd		-	10.4	-	
Switching Characteristics						
Turn-On Delay Time	Td(on)	VDD=30V, VGS=10V , RG=3Ω, ID=20A	-	7.8	-	nS
Rise Time	Tr		-	47	-	
Turn-Off Delay Time	Td(off)		-	29	-	
Fall Time	Tf		-	31	-	
Diode Characteristics						
Diode Forward Voltage	VSD	VGS=0V , IS=1A , TJ=25℃	-	-	1.2	V
Maximum Body-Diode Continuous Current	IS		-	-	45	A
Reverse Recovery Time	Trr	IS=20A, di/dt=100A/us, TJ=25℃	-	20	-	nS
Reverse Recovery Charge	Qrr		-	83	-	nC


Note :

- The EAS test condition is $V_{DD}=30V, V_{GS}=10V, L=0.5mH, R_G=25\Omega$


Typical Characteristics

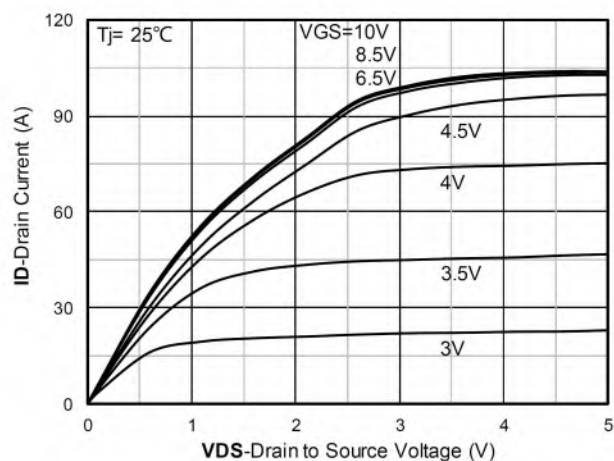


Output Characteristics

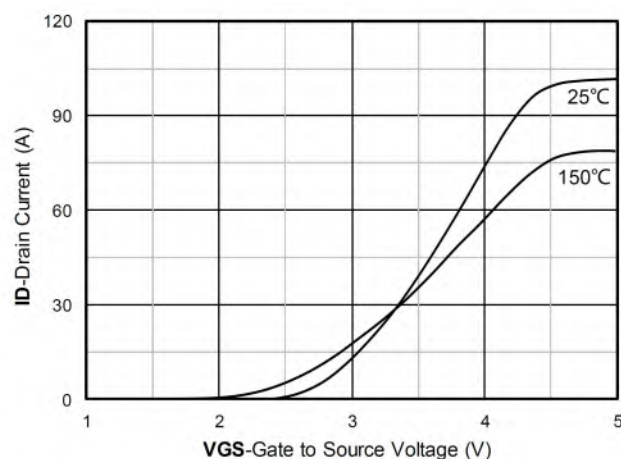


Transfer Characteristics

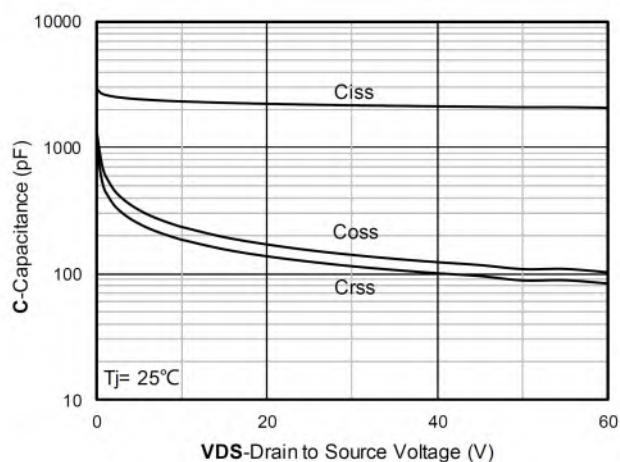


Capacitance Characteristics

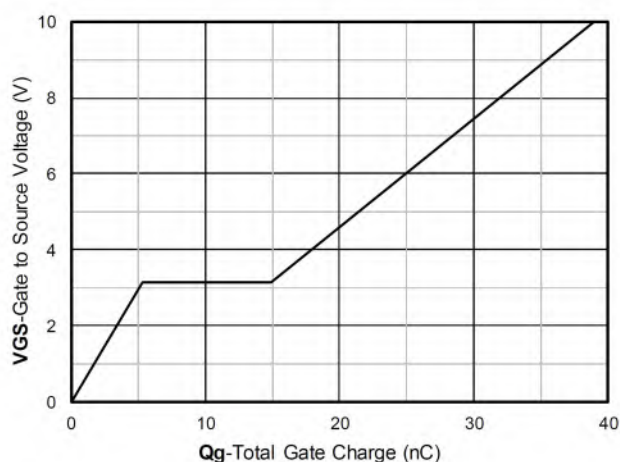


Gate Charge

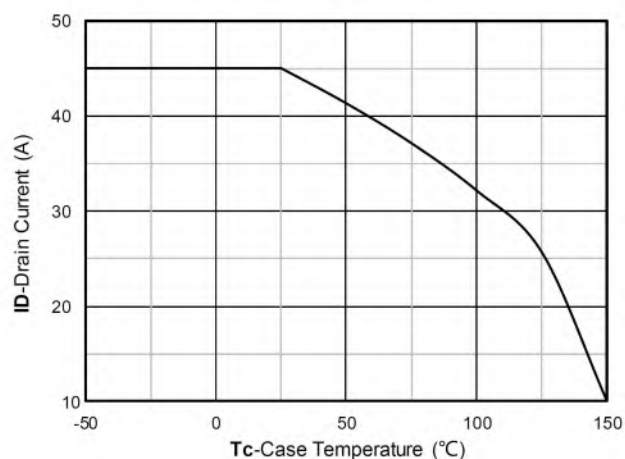


Current dissipation

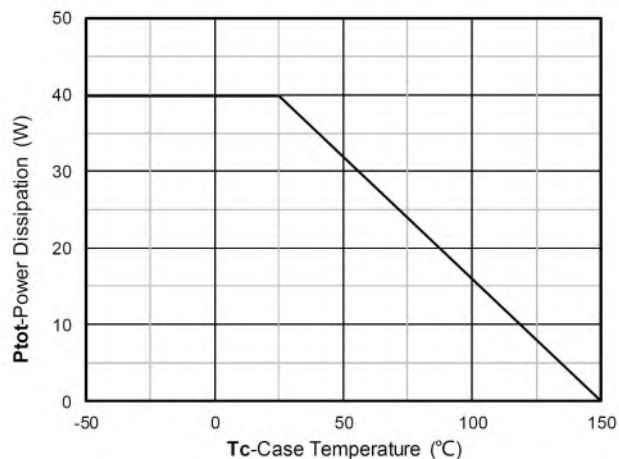


Power dissipation

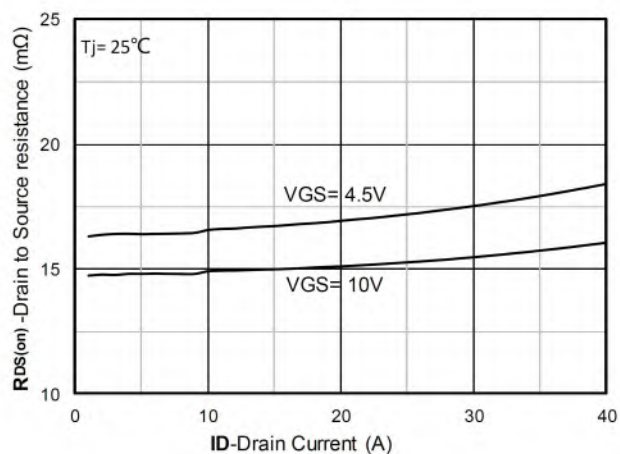


RDS(on) VS Drain Current

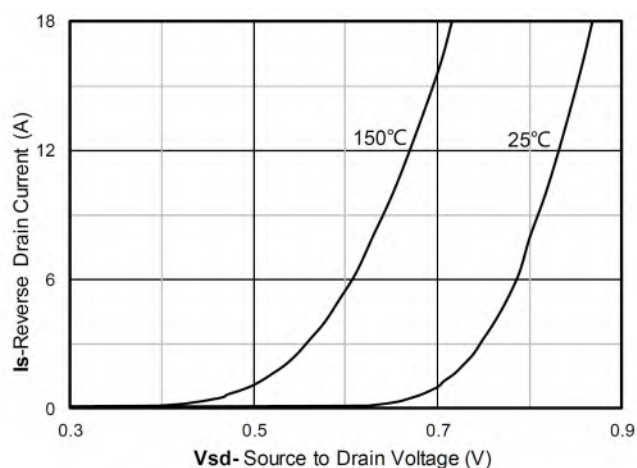


Forward characteristics of reverse diode

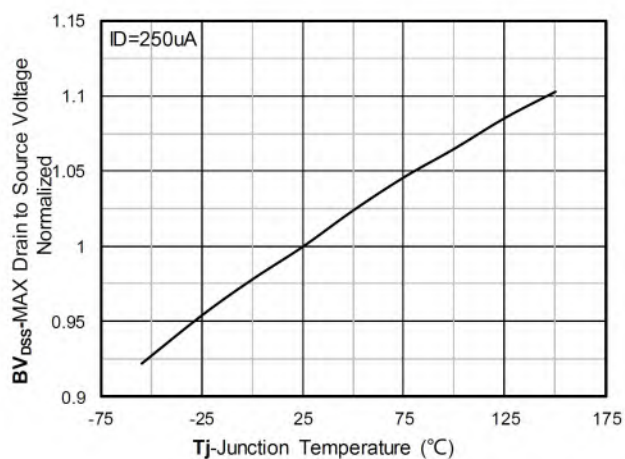


Normalized breakdown voltage

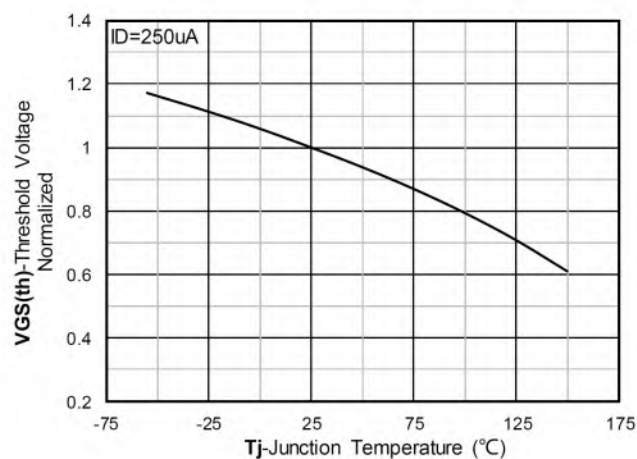

Normalized Threshold voltage

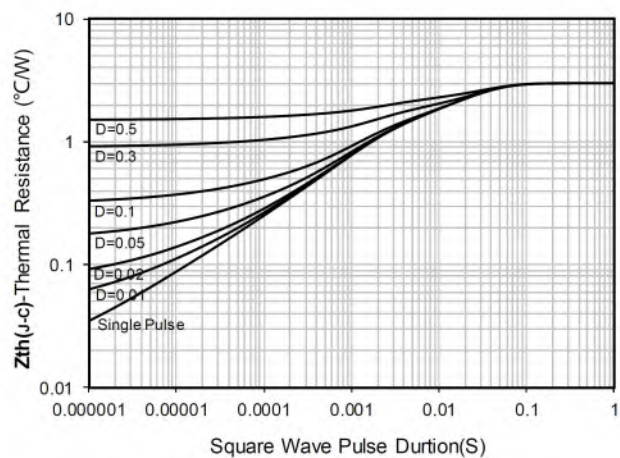


Maximum Transient Thermal Impedance

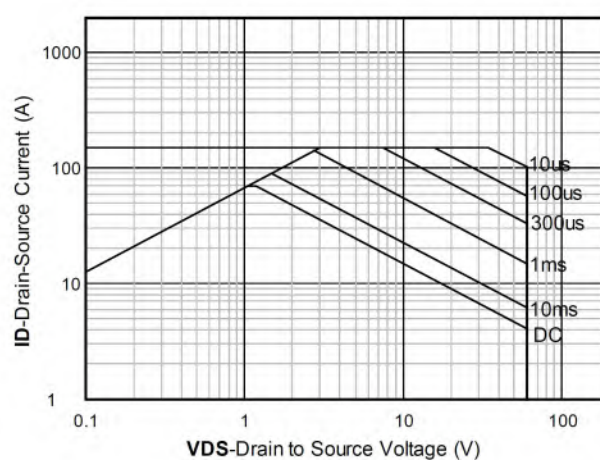

Safe Operation Area

TO-252 Package Information

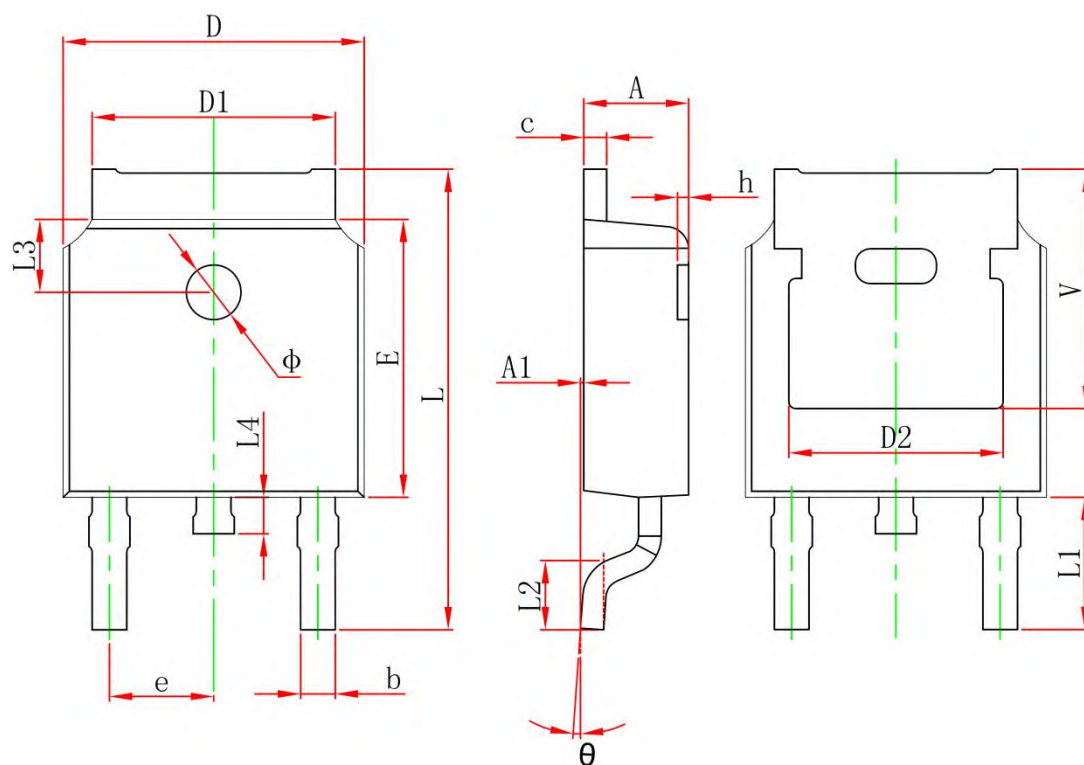

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 REF.		0.211 REF.	

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <https://www.chipnobo.com/en> or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <https://www.chipnobo.com/en>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。