

General Description

Low $R_{DS(ON)}$
RoHS and Halogen-Free Compliant

Applications

Load switch
PWM

General Features


$V_{DS} = 60V$ $I_D = 50A$

$R_{DS(ON)} = 12 m\Omega (typ.) @ V_{GS} = 10V$



100% UIS Tested

100% R_g Tested

NF:DFN5x6-8L



Marking:IRFH5406

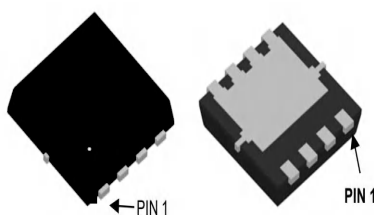

Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise noted)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	50	A
$I_D @ T_C = 100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V$	32	A
I_{DM}	Pulsed Drain Current	370	A
EAS	Single Pulse Avalanche Energy	98	mJ
$P_D @ T_C = 25^\circ C$	Total Power Dissipation	62.5	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ C$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ C$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	---	62	$^\circ C/W$
$R_{\theta JC}$	Thermal Resistance Junction-Case	---	3.6	$^\circ C/W$

Electrical Characteristics: ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV _{DSS}	Drain-Sourtce Breakdown Voltage	V _{GS} =0V,I _D =250 μ A	60	---	---	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{GS} =0V, V _{DS} =60V,T _J =25 °C	---	---	1	μ A
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ± 20V, V _{DS} =0A	---	---	± 100	nA
On Characteristics						
V _{GS(th)}	Drain-to-Source Leakage Current	V _{DS} = V _{GS} , I _D = 250μA	1.0	2.0	3.0	V
R _{DS(ON)}	Drain-Source On Resistance	V _{GS} =10V,I _D =20A	---	12	17	m Ω
		V _{GS} =4.5V,I _D =20A	---	16	21	
R _G	Gate Resistance	f = 1.0MHz open drain	---	1.4	---	Ω
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =30V, V _{GS} =0V, f=1MHz	---	1880	---	pF
C _{oss}	Output Capacitance		---	110	---	
C _{rss}	Reverse Transfer Capacitance		---	88	---	
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{DS} =30V , V _{GS} =10V , R _G =3 Ω ,I _D =20A	---	10	---	ns
t _r	Rise Time		---	23	---	ns
t _{d(off)}	Turn-Off Delay Time		---	58	---	ns
t _f	Fall Time		---	8	---	ns
Q _g	Total Gate Charge	V _{GS} =10V, V _{DS} =30V, I _D =20A	---	37	---	nC
Q _{gs}	Gate-Source Charge		---	7.5	---	nC
Q _{gd}	Gate-Drain “Miller” Charge		---	8	---	nC
Drain-Source Diode Characteristics						
Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{SD}	Forward Voltage	V _{GS} =0V,I _S =20A,,T _J =25 °C	---	1.2	---	V
I _s	Continuous Diode Forward Current		---	---	50	A
t _{rr}	Continuous Source Current	V _{GS} = 0V, I _F = 20A,	---	29	---	ns
q _{rr}	Pulsed Source Current	dI _S /dt = 100A/μs,	---	21	---	nC

Typical Characteristics

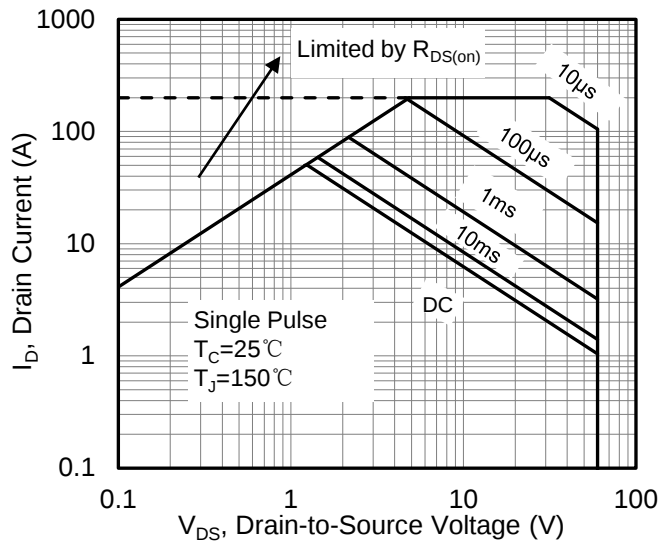


Figure 1. Maximum Safe Operating Area

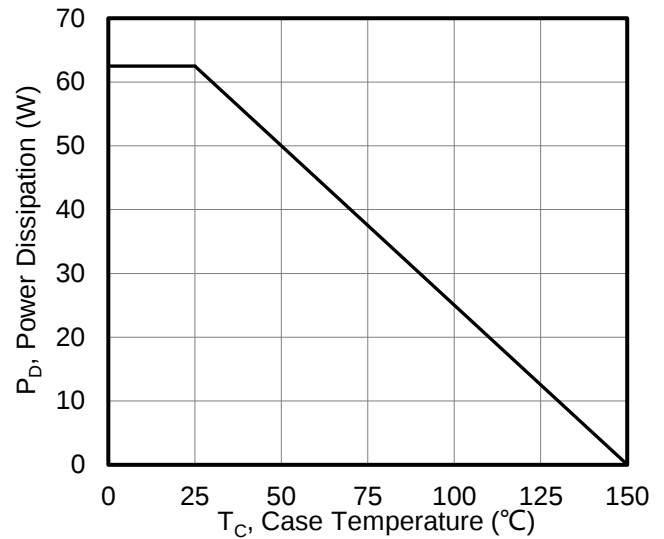


Figure 2. Maximum Power Dissipation vs. Case Temperature

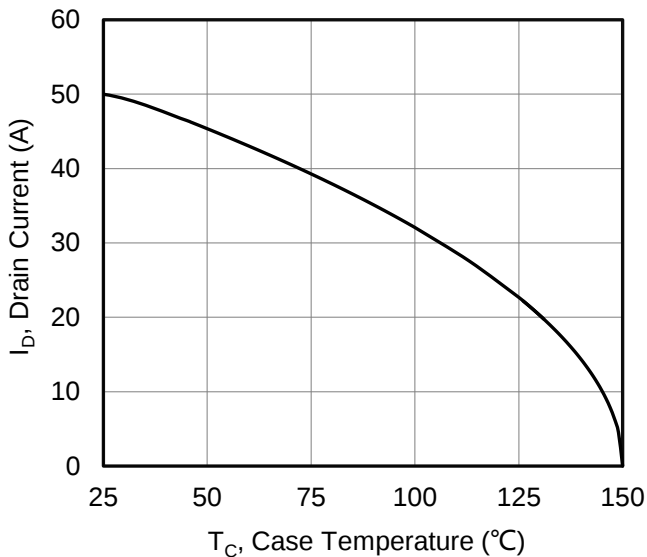


Figure 3. Maximum Continuous Drain Current vs

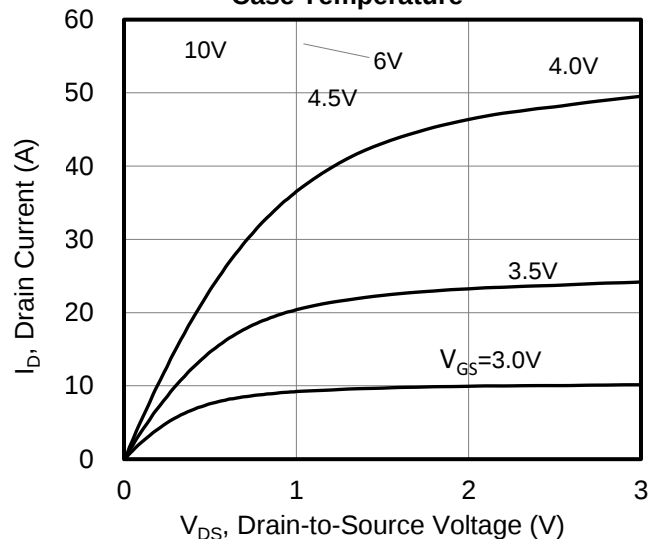


Figure 4. Typical output Characteristics

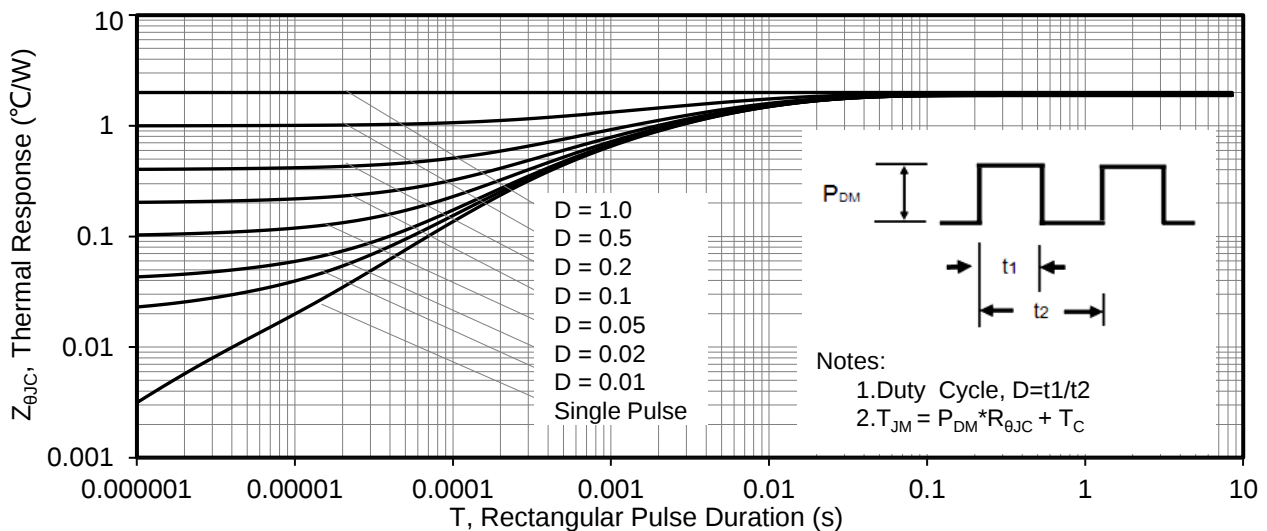


Figure 5. Maximum Effective Thermal Impedance, Junction to Case

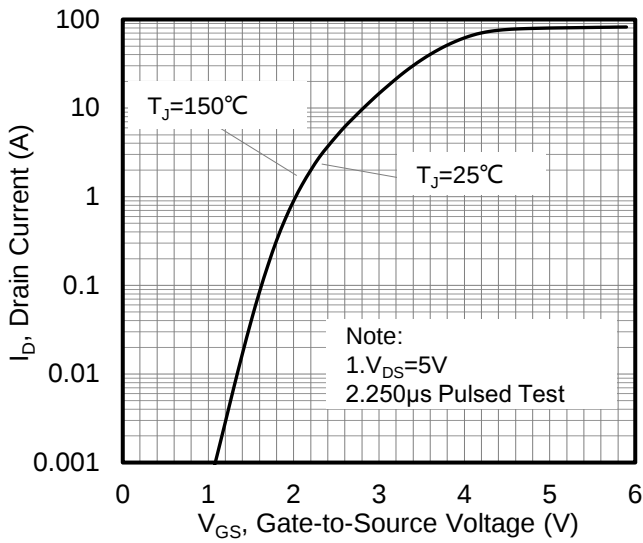


Figure 6. Typical Transfer Characteristics

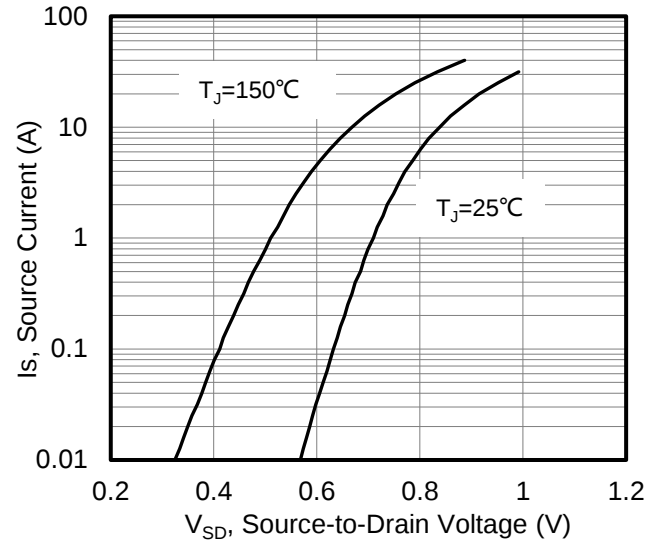


Figure 7. Typical Body Diode Transfer Characteristics

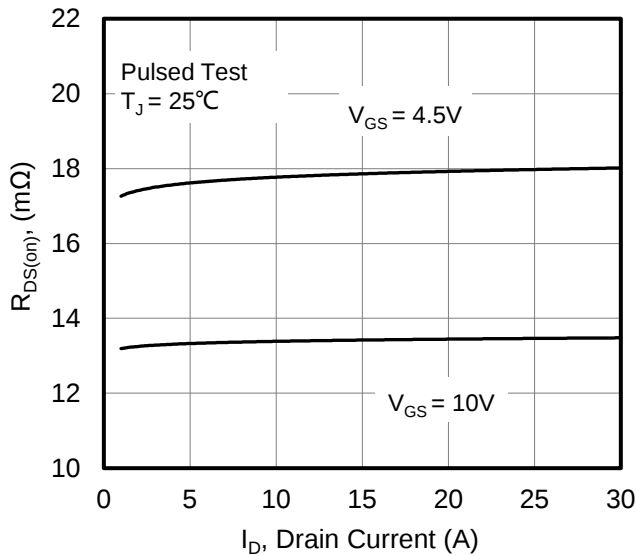


Figure 8. Drain-to-Source On Resistance vs Drain Current

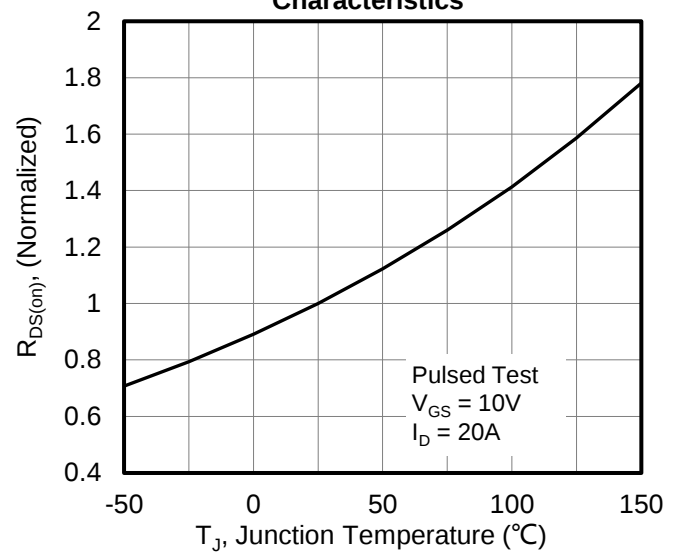


Figure 9. Normalized On Resistance vs Junction Temperature

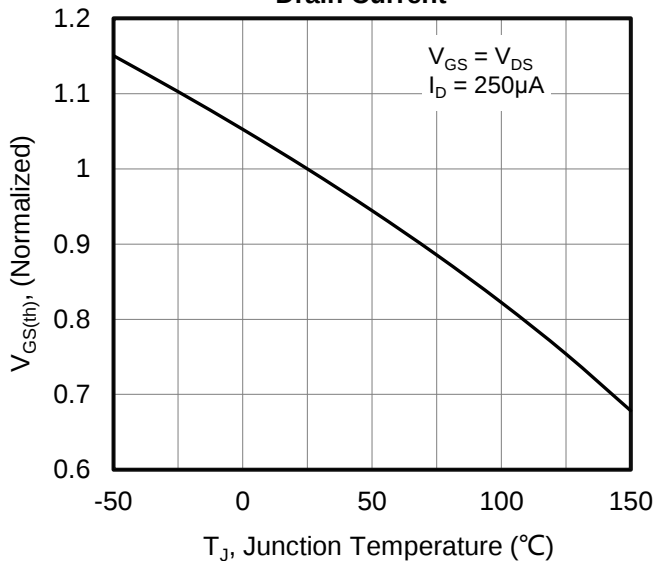


Figure 10. Normalized Threshold Voltage vs Junction Temperature

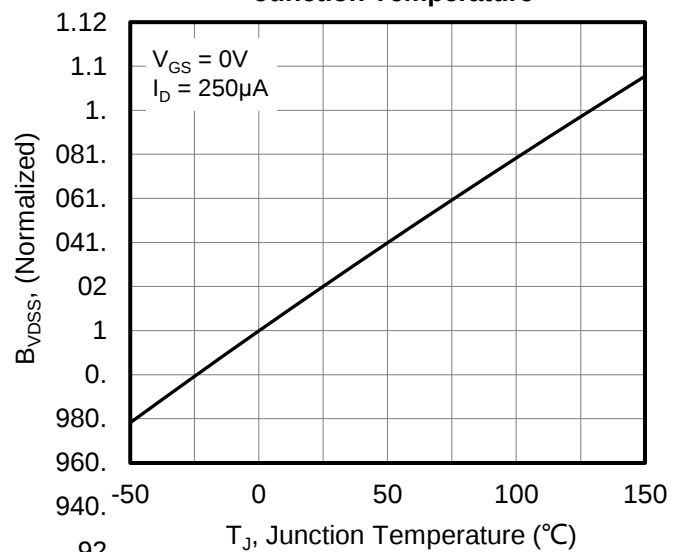


Figure 11. Normalized Breakdown Voltage vs Junction Temperature

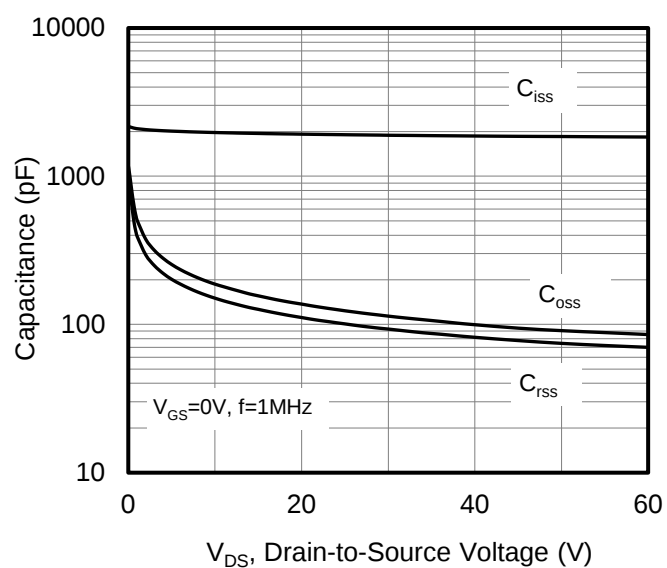


Figure 12. Capacitance Characteristics


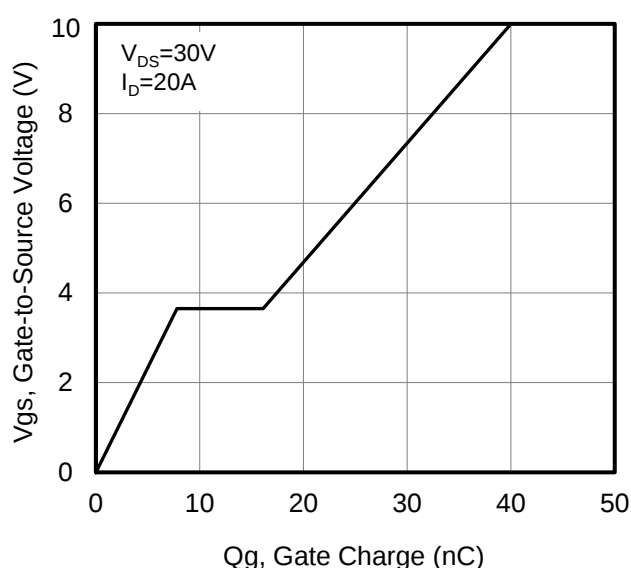



Figure 13. Typical Gate Charge vs Gate to Source Voltage

Package Mechanical Data:DFN5x6-8L

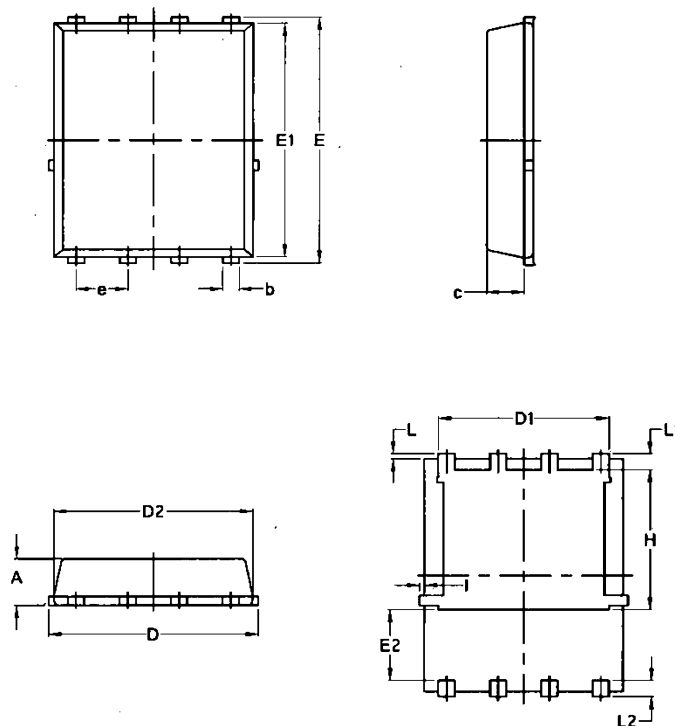

Symbol	Common			
	mm		Inch	
	Mim	Max	Min	Max
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.824	0.0970	0.0324	0.082
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.95	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	/	0.0630	/
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	/	0.18	/	0.0070

PDFN5×6-8L Embossed Carrier Tape

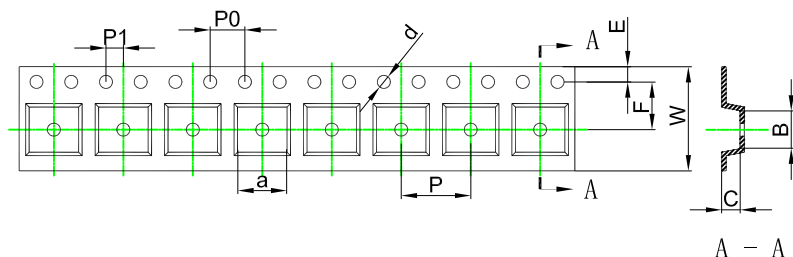


Packaging Description:

SOP-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2,500 units per 13" or 33cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


ALL DIM IN mm

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
PDFN5×6-8L	6.40	5.40	2.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

PDFN5×6-8L Tape Leader and Trailer

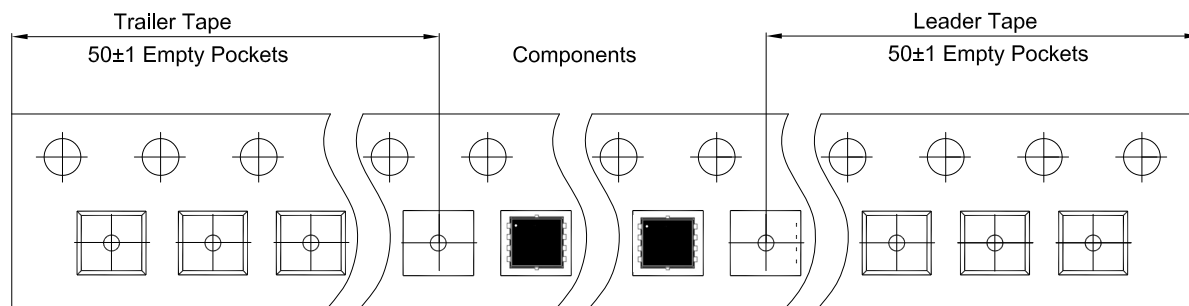

PDFN5×6-8L Reel

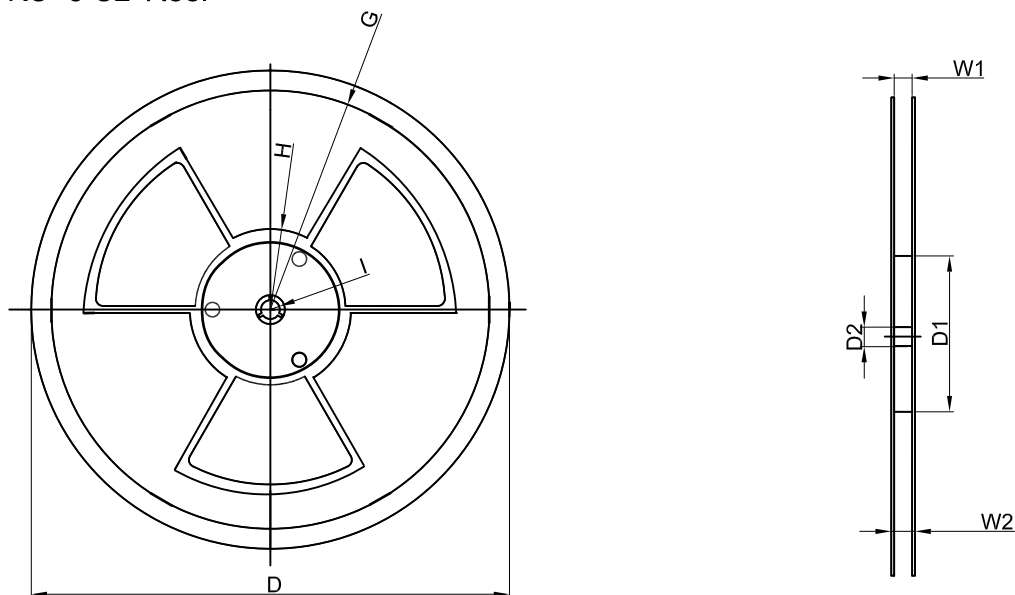

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
13"Dia	Ø330.00	100.00	13.00	R135.00	R55.00	R6.50	12.00	14.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
5,000 pcs	13 inch	10,000 pcs	370×355×52	50,000 pcs	400×360×368	

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <https://www.chipnobo.com/en> or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <https://www.chipnobo.com/en>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。